

Rev.	Description of revision	Date	By
Ø	Refer from QP-14145A (FAW-1233-TX) and use -01 for and -02 for 200mm.	25/7/2015	Wittaya
C	UPDATE 700 MM LENGTH VERSION	13/08/2018	Kashiwa
D	UPDATE LENGTH. -60 FOR 600MM.	21/08/2018	Kashiwa



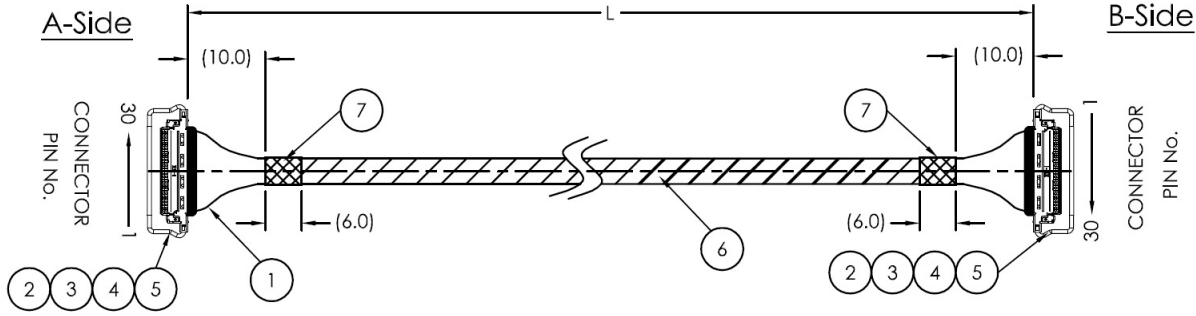


Fig. 1 Applying UV resin

Description	L (mm)
FAW-1233-01	100.0±5.0
FAW-1233-02	200.0±5.0
FAW-1233-03	300.0±10.0
FAW-1233-04	400.0±15.0
FAW-1233-05	500.0±15.0
FAW-1233-60	600.0±15.0
FAW-1233-07	700.0±15.0

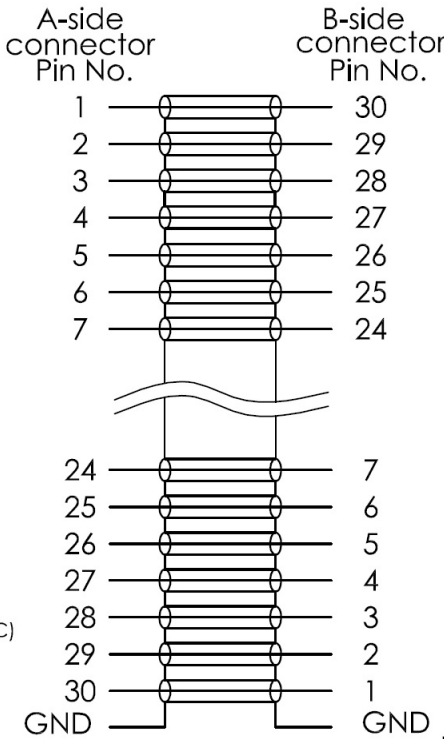

WIRING



NOTE.
1. Apply UV resin at the end of connector to cover cables both sides of the cable assembly (Fig.1).

Test:
Insulation resistance: Min 50M ohms. (DC.300V Megaohm tester, 0.1 SEC)
Dielectric strength: No break down. (AC100V 0.1 SEC)
Continuity wire collation: To be correct as shown in wiring.

8	UV RESIN	2	LOCBOND P/N : LOCBOND 349
7	TAPE	2	CHUKOH P/N: ASF-116T
6	TAPE	1	CHUKOH P/N: SEF-110
5	FLAT COPPER WIRE	4	GROUND BAR
4	PULL BAR	2	I-PEX P/N : 2766-0301
3	SHIELD PLATE	2	I-PEX P/N : 2764-0301-002
2	CONNECTOR	2	I-PEX P/N : 20634-130T-02
1	CABLE	30	UL10231 AWG40 MCX (Z=50ohm)
ITEM	DESCRIPTION	Q'TY	REMARK

Title
P/N: FAW-1233-XX

Drawn by
Kashiwa

Drawing No.
QP-14217D

Date
21 Aug.2018

Unit:mm