



LEOPARD
IMAGING

LI-AGO-BOX-GM2B-8CAM



Address:

910 Auburn Ct
Fremont, CA 94538
USA



Phone:

+1 (408)263-0988

Fax:

+1 (408)217-1960



Sales:

sales@leopardimaging.com

Support:

support@leopardimaging.com

INTRODUCTION

The LI-AGO-BOX-GM2B-8CAM is an embedded AI supercomputer, supporting up to 8 cameras. It includes NVIDIA Jetson 64GB / 32GB AGX ORIN SOM and De-Serializer carrier board with 2x Maxim GMSL2 MAX96712.

KEY FEATURES

- NVIDIA Jetson 64GB / 32GB AGX Orin SOM: Included
 - AI Performance
 - AGO 64GB: 275 TOPS (INT8)
 - AGO 32GB: 200 TOPS (INT8)
 - GPU
 - AGO 64GB: NVIDIA Ampere architecture with 2048 NVIDIA CUDA® cores and 64 tensor cores
 - AGO 32GB: NVIDIA Ampere architecture with 1792 NVIDIA CUDA® cores and 56 tensor cores
 - GPU Max Frequency
 - AGO 64GB: 1.3 GHz AGO 32GB: 930 MHz
 - CPU
 - AGO 64GB: 12x Arm Cortex-A78AE cores | 3 CPU clusters (4 cores/cluster) | 259 SPECint_rate2006
 - AGO 32GB: 8x Arm Cortex-A78AE cores | 2 CPU clusters (4 cores/cluster) | 177 SPECint_rate2006
 - DL Accelerator: 2x NVDLA v2.0
 - DLA Max Frequency
 - AGO 64GB: 1.6 GHz | 52.5 TOPs each (Sparse INT8)
 - AGO 32GB: 1.4 GHz | 46 TOPs each (Sparse INT8)
 - Memory:
 - AGO 64GB: 64GB 256-bit LPDDR5 DRAM
 - AGO 32GB: 32GB 256-bit LPDDR5 DRAM
 - Storage
 - 1 x M.2 PCIe interface with 128GB SSD drive
 - Video Encode: 1x 4K60 | 3x 4K30 | 6x 1080p60 | 12x 1080p30 (H.265) H.264, AV1
 - Video Decode: 1x 8K30 | 2x 4K60 | 4x 4K30 | 9x 1080p60 | 18x 1080p30 (H.265) H.264, VP9, AV1
- Ethernet: 10/100/1000M BASE-T Ethernet
- Options for wireless modules
 1. WIFI & Bluetooth: Wi-Fi 2.4GHZ & 5GHz, BT 5.0
 2. LTE: 4G or 5G
 3. GNSS
- Camera: two Mini Quad FAKRA connectors supporting up to 8 cameras
- DeSerializer: Maxim MAX96712
- Power supply: 12 ~ 19 VDC
- Power Consumption (BOX + 8x FAKRA cameras): ~ 40 W (each FAKRA camera consumption: ~ 1.5 W (20 fps @ 2880 x 1860))
- Weight: ~ 1670 g
- Allows customization

INTERFACES

- Network: 1 x RJ45 Gigabit Ethernet port
- Camera: 2 x Mini Quad FAKRA connectors
- Video output: 1 x HDMI connector
- UART: 1 x USB2.0 Mirco B
- USB Type-C:
 - 1 x USB 3.0 Type-C (data)
 - 1 x USB 2.0 Type-C (flashing port)
- 2 x USB 2.0 Type-A interfaces
- 1 x SIM card socket
- 1 x Power supply socket
- 5 x ANT interfaces (optional)
- Recovery, RST and PWR buttons included

NOTE:

- The ANT interfaces are not used in default.

Environmental

- Operating temperature: TBD
- Storage temperature: TBD
- Storage humidity: TBD
- Vibration: TBD
- Ingress Protection: IP40



Ordering Information By Default

No	Part#	Description
1	LI-AGO-BOX-GM2B-8CAM-64GB	64GB AGO BOX (no wireless modules included)
2	LI-AGO-BOX-GM2B-8CAM-32GB	32GB AGO BOX (no wireless modules included)

Ordering Information For Options

Part#: **LI-AGO-BOX-GM2B-8CAM-X-Y**

AGX Orin SOM memory

- 64GB
- 32GB

Options for wireless modules

A: LTE-Main, 4G

B: LTE-Aux, 5G

C: GNSS,GPS

D: WIFI/BT, BT 5.0

NOTE:

The options for wireless modules can be combined freely. If you need, please contact sales.


BOM By Default

#	Items	Part Number	QTY	Unit
1	AGO BOX	LI-AGO-BOX-GM2B-8CAM-X	1	Set
2	Power Supply Accessories (for test only)	• 1 x 12V power adapter • 1 x cable adapter	1	Set

NOTE:

1. The 4-to-1 cable is not included. You can purchase via the following address:
<https://www.leopardimaging.com/product/accessories/cables/li-fcb-4t1-ss-2m-np-t1/>

DIMENSIONS

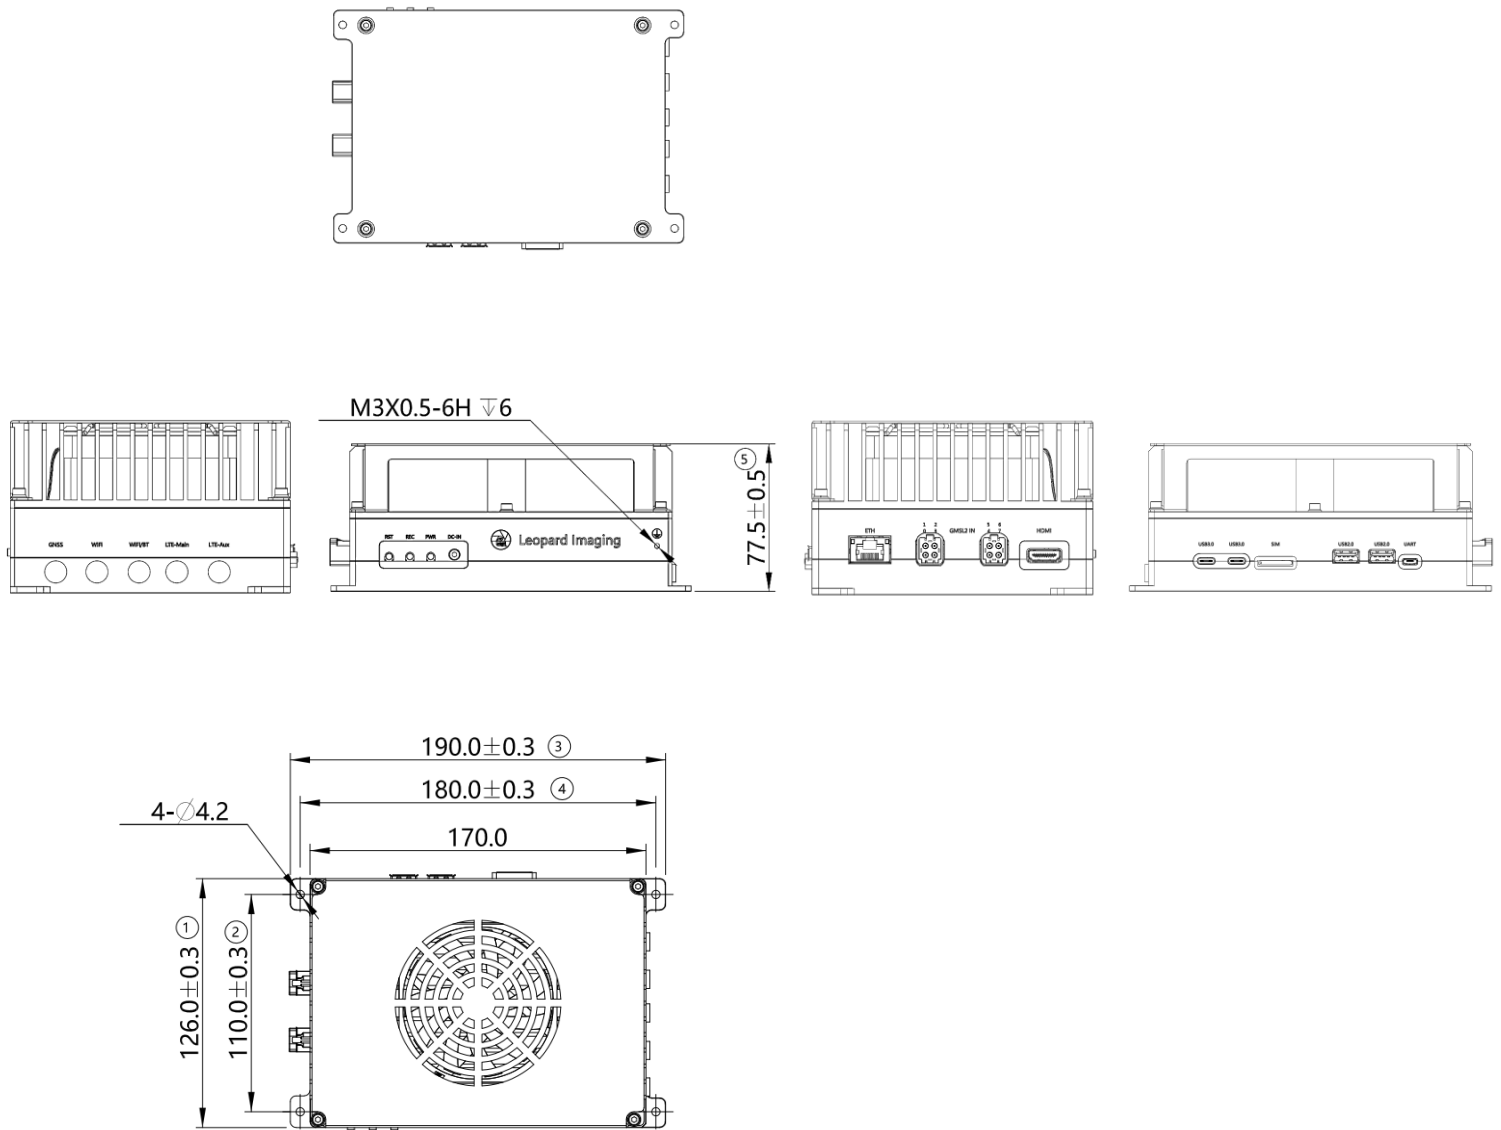

NOTE:

- ⊗ marked are important sizes.
- Tolerances for others unmarked refer to the Tolerance table.
- Unit: mm

TOLERANCE TABLE					
LENGTH TOLERANCE		CHAMFER TOLERANCE		ANGLE TOLERANCE	
Size X	Tolerance	Size X	Tolerance	Size X	Tolerance
0.5 < X ≤ 3	±0.1	0.5 < X ≤ 3	±0.2	X ≤ 10	±1°
3 < X ≤ 6	±0.1	3 < X ≤ 6	±0.5	10 < X ≤ 50	±30'
6 < X ≤ 30	±0.2	6 < X ≤ 30	±1	50 < X ≤ 120	±20'
30 < X ≤ 120	±0.3	X > 30	±2	120 < X ≤ 400	±10'
120 < X ≤ 400	±0.5			X > 400	±5'
400 < X ≤ 1000	±0.8				
X > 1000	±1.2				

Interfaces description

Power supply

DC-IN

- Part#: AC0002-0406-001-H0
- Number of Positions: 4
- Mating Diameter: 2.5 mm ID x 5.5 mm OD
- Power supply range: 12 ~ 19 VDC

Note: 12 VDC by default.



Antenna panel for Wireless modules (Not used in default)

- Connector Type: SMA



• Mini Quad FAKRA Connector

- Part#: 0-2304168-9//2304168-9
- Number of Positions: 4
- Mating Connector Part#: 2298721-9



● REVISION HISTORY

Revision	Description	Release Date
0.1	Initial draft.	30 Jun 2025
0.2	Updated pictures,	23 Sep 2025
0.3	Updated the power supply description.	06 Jan 2026

910 Auburn Ct, Fremont, CA 94538, USA

Phone: +1-408-263-0988

Fax: +1-408-217-1960

Email: sales@leopardimaging.com

Website: www.leopardimaging.com

