



LEOPARD
IMAGING

LI-USB32-AR2020-079H



Address:

910 Auburn Ct
Fremont, CA 94538
USA



Phone:

+1 (408)263-0988

Fax:

+1 (408)217-1960



Sales:

sales@leopardimaging.com

Support:

support@leopardimaging.com

Key Features

- USB 3.2 GEN2 10Gbps high Speed support
- RAW data output without compression
- UVC compliant
- Supports M12 lens
- Allows customization
- USB + 5 VDC powered device
- Part#: **LI-USB32-AR2020-079H**

Applications

- Surveillance Camera
- Video Conferencing
- Machine Vision
- 3D and Stereo Imaging

Lens Specifications


Effective Focal Length	4.5 mm
Aperture, F/#	1.8
Field of View (FOV)	90° diagonal
	79° horizontal
	63° vertical
Optical Distortion	-2.8%
Relative Illumination	> 50%
IR Filter	650 nm IR cut filter
Lens Mount	M12 x P0.5



SEPCIFICATIONS

General Behavior	
Video Resolution @ Frame Rate	3840 x 3840 @ 20.1 fps
Interface (Optical)	
IR Cut Filter (on lens)	650 nm IR cut filter
Sensor	ON Semiconductor 20 Mp CMOS sensor AR2020
Format	1/1.8"
Active Pixels	5120 (H) x 3840 (V)
Pixel Size	1.4 μ m Back Side Illuminated (BSI)
Lens Mount	M12
Interface (Electrical)	
Interface	USB 3.2
Supply Voltage	USB 3.2 +5 VDC power source
Power Consumption	870 mA @ 5V (3840 x 3840 @ 20.1 fps)
Weight	
LI-USB32-AR2020-079H	~320 g
Adjustment (Manual)	
Shutter	Yes
Gain	Yes
Register Access	Yes
Temp Info (LI-USB32-AR2020-079H)	
Operating Temp	-20°C ~ +50°C
Storage Temp	-40°C ~ +85°C
Supported OS	
Windows OS, Standard Linux OS and other OS with full UVC drivers	

DIMENSIONS

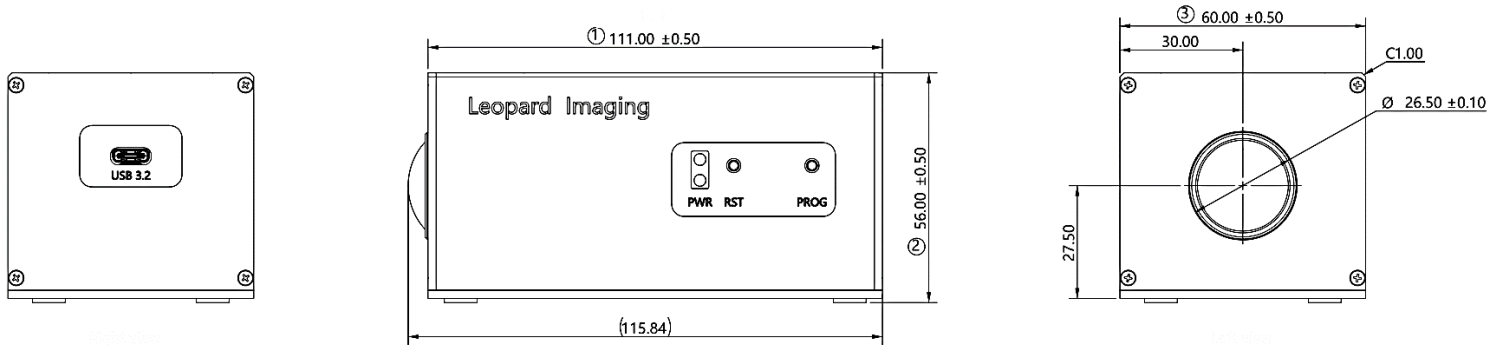

NOTE:

- ⊗ marked are important sizes.
- Tolerances for the unmarked refer to the Tolerance table.
- All materials are compliant with RoHS requirements.
- Unit: mm

TOLERANCE TABLE					
LENGTH TOLERANCE		CHAMFER TOLERANCE		ANGLE TOLERANCE	
Size X	Tolerance	Size X	Tolerance	Size X	Tolerance
$0.5 < X \leq 3$	± 0.1	$0.5 < X \leq 3$	± 0.2	$X \leq 10$	$\pm 1^\circ$
$3 < X \leq 6$	± 0.1	$3 < X \leq 6$	± 0.5	$10 < X \leq 50$	$\pm 30'$
$6 < X \leq 30$	± 0.2	$6 < X \leq 30$	± 1	$50 < X \leq 120$	$\pm 20'$
$30 < X \leq 120$	± 0.3	$X > 30$	± 2	$120 < X \leq 400$	$\pm 10'$
$120 < X \leq 400$	± 0.5			$X > 400$	$\pm 5'$
$400 < X \leq 1000$	± 0.8				
$X > 1000$	± 1.2				

RST & PROG BUTTON

Function	Description
RST	FX10 reset button
PROG	FX10 program button



INTERFACES OF INDICATOR

Function	Description
Power	LED turns on after power on
Program	LED turns on only when pressing the PROG button



● REVISION HISTORY

Revision	Description	Release Date
1.0	First Release.	25 Jul 2024
1.1	Deleted the shutter type.	14 Sep 2024
1.2	Deleted color info and SDK supported,	02 Apr 2026

910 Auburn Ct, Fremont, CA 94538, USA

Phone: +1-408-263-0988

Fax: +1-408-217-1960

Email: sales@leopardimaging.com

Website: www.leopardimaging.com

