




LEOPARD
IMAGING

LI-IMX662-RV-GigE-118H

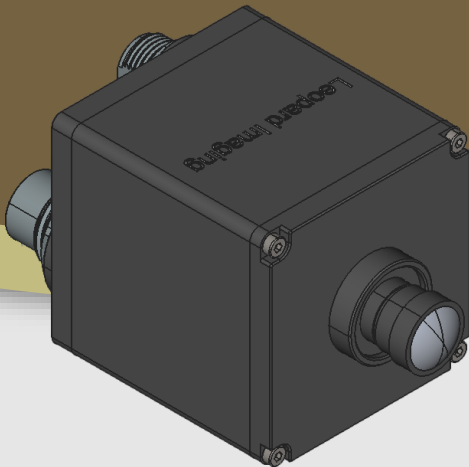

Address:

910 Auburn Ct
Fremont, CA 94538
USA



Phone:

+1 (408)263-0988

Fax:

+1 (408)217-1960



Sales:

sales@leopardimaging.com

Support:

support@leopardimaging.com

TECHNICAL FEATURES

- Rockchip RV1126 Processor:
 - CPU: Quad core ARM Cortex-A7 and RISC-V MCU
 - 2.0Tops NPU, support INT8/ INT16
 - Memory:
 - 32-bit DDR3 / DDR3L / LPDDR3 / DDR4 / LPDDR4
 - Support eMMC 4.51, SPI Flash, Nand Flash
 - Support 250 ms fast booting
 - Up to 3 sensor simultaneous input
 - 4K H.264 / H.265 encoder and decoder
- Sensor: Sony STARVIS 2 Diagonal 6.45 mm
CMOS Image Sensor IMX662
- Resolution: 1937 (H) x 1097 (V) (active pixels)
- Power supply:
 - POE / External 12 VDC from M8 CONN

Note: POE in default

- Power Consumption: TBD
- Weight: TBD
- Part#: LI-IMX662-RV-GigE-118H

Environmental


- Operating temperature: -30°C ~ +70°C
- Protection: IP67

Applications






- IoT
- Drone
- Robots

LENS SPECIFICATIONS

Effective Focal Length	2.8 mm
Aperture, F/#	2.1
Field of View (FOV)	118° horizontal
OP Distortion	< -63%
Relative Illumination	> 40%
IR Filter	650 nm IR cut filter
Lens Mount	M12 x 0.5



DIMENSIONS

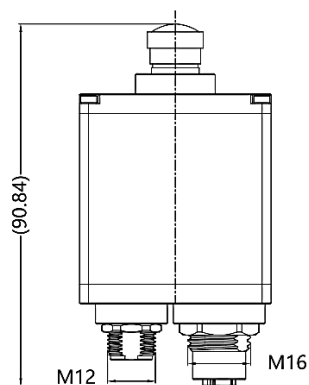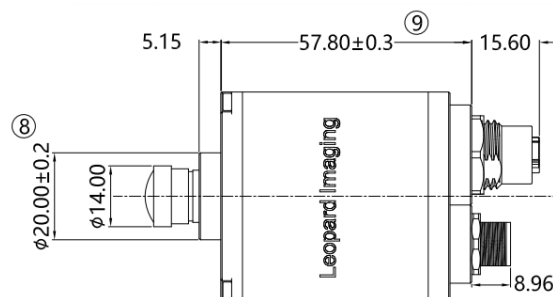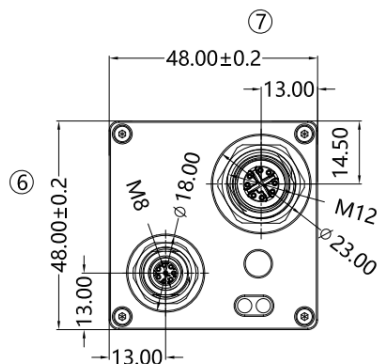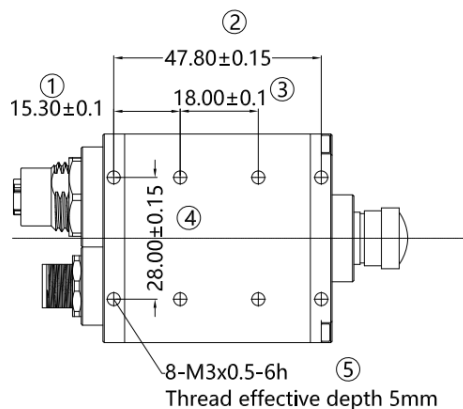


NOTE:

- Other unmarked tolerances refer to the tolerance table.
- ⊗ marked are important sizes.
- All materials are compliant with RoHS requirements.
- Unit: mm

TOLERANCE TABLE					
LENGTH TOLERANCE		CHAMFER TOLERANCE		ANGLE TOLERANCE	
Size X	Tolerance	Size X	Tolerance	Size X	Tolerance
0.5 < X ≤ 3	±0.1	0.5 < X ≤ 3	±0.2	X ≤ 10	±1°
3 < X ≤ 6	±0.1	3 < X ≤ 6	±0.5	10 < X ≤ 50	±30'
6 < X ≤ 30	±0.2	6 < X ≤ 30	±1	50 < X ≤ 120	±20'
30 < X ≤ 120	±0.3	X > 30	±2	120 < X ≤ 400	±10'
120 < X ≤ 400	±0.5			X > 400	±5'
400 < X ≤ 1000	±0.8				
X > 1000	±1.2				



SYSTEM BLOCK DIAGRAM

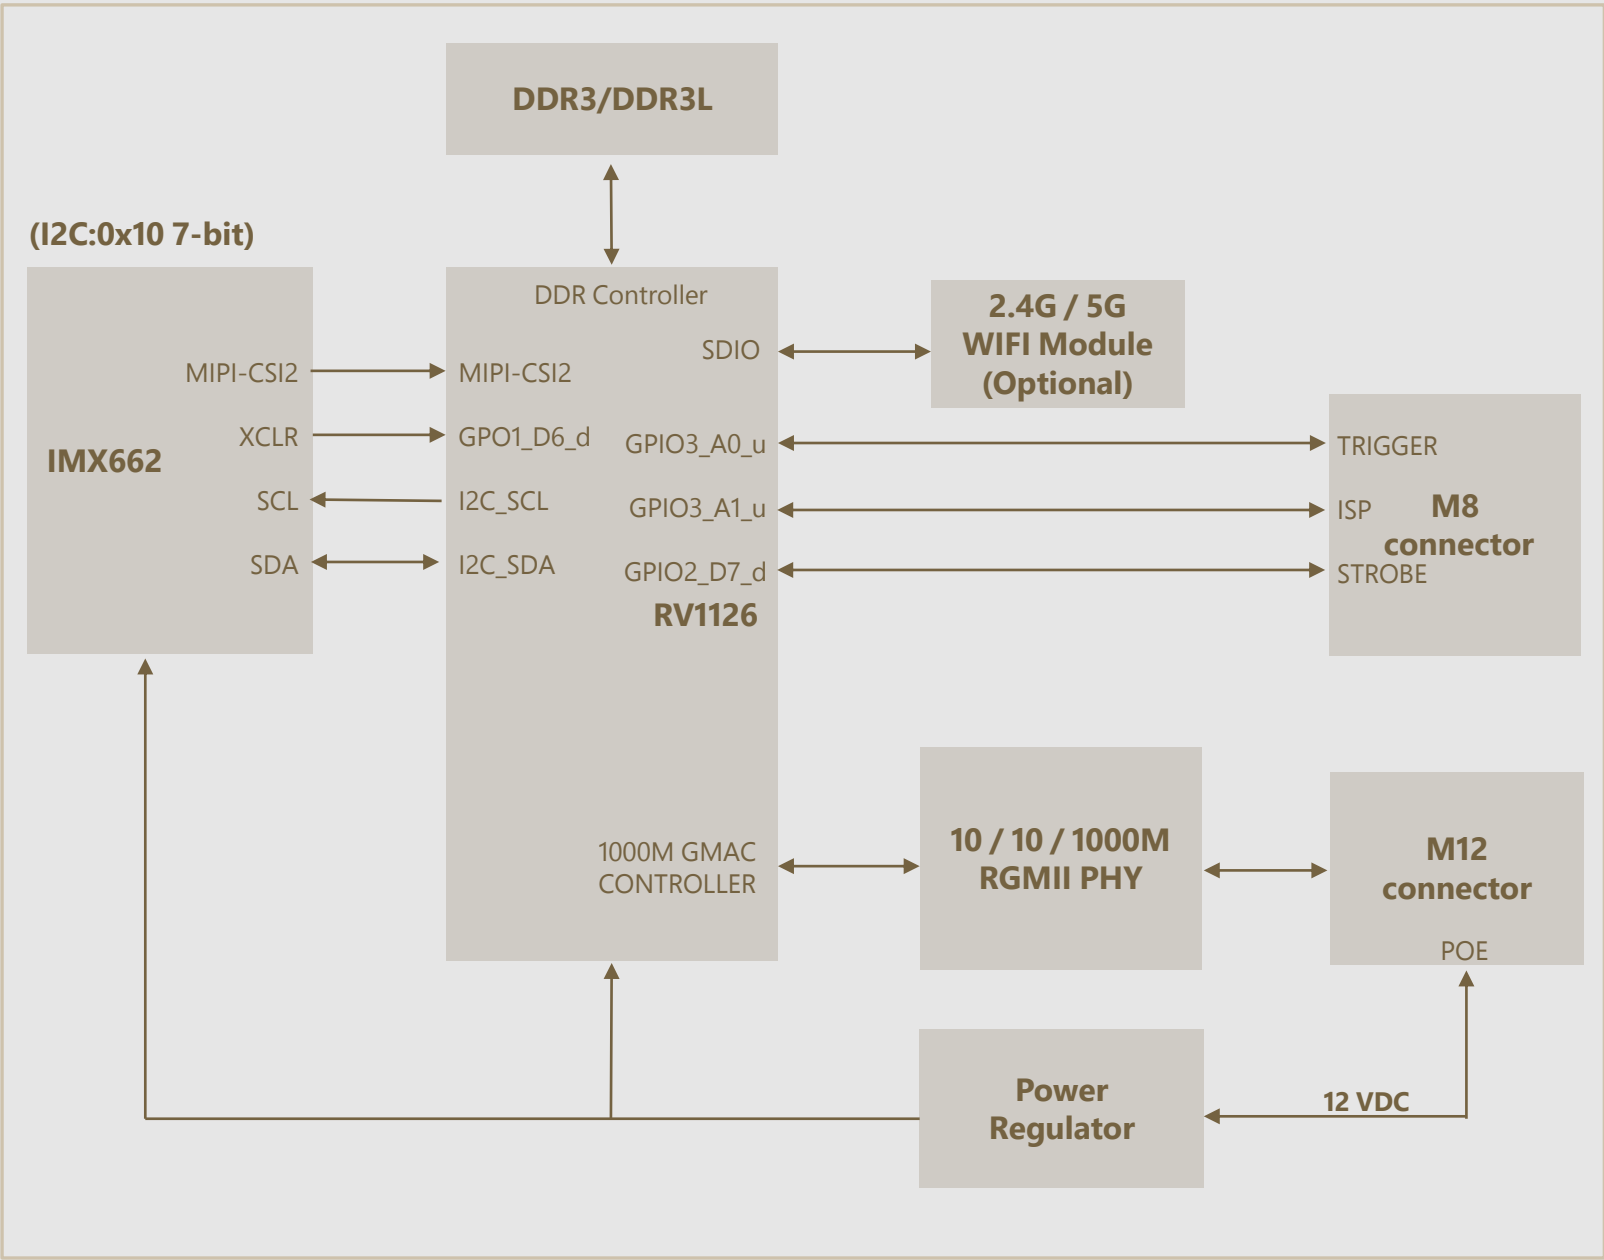

INTERFACE M8 CONNECTOR

■ Connector Part#: M8-S8A-GWFM12

■ Number of Positions: 8





PINOUT DETAILS OF M8

Pin No	Signal Name	Pin Type	Description	Voltage Level
1	EXT-TRIGGER +	INPUT	Opto Coupler Isolated Trigger Input +	3.3V
2	VCC_12P0	POWER	Optional external input 12V power (nonisolated)	12V
3	GPO_ISP +	OUTPUT	Opto Coupler Isolated GPO signal +	3.3V
4	GROUND	POWER	Ground	-
5	CAM_STROBE +	OUTPUT	Opto Coupler Isolated Strobe output +	3.3V
6	CAM_STROBE -	OUTPUT	Opto Coupler Isolated Strobe output -	-
7	EXT-TRIGGER -	INPUT	Opto Coupler Isolated Trigger Input -	-
8	GPO_ISP -	OUTPUT	Opto Coupler Isolated GPO signal -	-

INTERFACE M12 CONNECTOR

■ Connector Part#: M12-S8X-GWFM16

■ Number of Positions: 12



● PINOUT DETAILS OF M12

Pin No	Signal Name	Pin Type	Description	Voltage Level
1	MDI0+	OUTPUT	Ethernet MDI Signal 0 pair +	48V
2	MDI0-	OUTPUT	Ethernet MDI Signal 0 pair -	48V
3	MDI1+	OUTPUT	Ethernet MDI Signal 1 pair +	48V
4	MDI1-	OUTPUT	Ethernet MDI Signal 1 pair -	48V
5	MDI3+	OUTPUT	Ethernet MDI Signal 3 pair +	48V
6	MDI3-	OUTPUT	Ethernet MDI Signal 3 pair -	48V
7	MDI2-	OUTPUT	Ethernet MDI Signal 2 pair -	48V
8	MDI2+	OUTPUT	Ethernet MDI Signal 2 pair +	48V

- REVISION HISTORY

Revision	Description	Release Date
0.1	Initial draft.	28 Feb 2025

910 Auburn Ct, Fremont, CA 94538, USA
Phone: +1-408-263-0988
Fax: +1-408-217-1960
Email: sales@leopardimaging.com
Website: www.leopardimaging.com

