

LI-USB30-AR0822-YUV-099H





Address:

48820 Kato Road Suite 100B Fremont, CA 94538 USA



Phone:

+1 (408)263-0988

Fax:

+1 (408)217-1960



Sales:

sales@leopardimaging.com

Support:

support@leopardimaging.com



INTRODUCTION

The LI-USB30-AR0822-YUV-099H is a Hyperlux LH USB camera with ON Semiconductor stacked 1/1.8-inch BSI (back side illuminated) CMOS digital image color sensor AR0822, ISP and USB3.0 Controller. It has a dedicated Inbuilt high-performance Image Signal Processor (ISP) chip tuned to bring out the best-in-class image quality and color reproduction, making it adaptable to different lighting conditions. This camera outputs YUV image data.

SPECIFICATIONS

Video Resolution @ Frame Rate	TBD	
Output Format	YUV422	
Sensor	ON Semiconductor stacked 1/1.8-inch BSI CMOS digital image sensor AR0822	
Optical Format	1/1.8" (8.81 mm diagonal)	
Color / Mono	Color	
Pixel Size	2.0 μm x 2.0 μm, BSI	
Resolution	3840 (H) x 2160 (V) (active pixels)	
xDR (X-tended Dynamic Range)	Supported	
ISP	Included	
USB30 Controller	Included	
Interface	USB 3.0 Micro B	
Supply Voltage	5 VDC power source from USB3.0 port	
Power Consumption	TBD	
Operating Temp	TBD	
Storage Temp	TBD	
Ingress Protection	TBD	
Weight	TBD	

APPLICATIONS

- loT
- Security
- Robots

Lens Specifications


Effective Focal Length	$4.5\pm5\%$ mm
Aperture, F/#	2.7± 5%
Field of View (FOV)	99° horizontal
IR Filter	650 nm IR CUT Filter
Lens Mount	M12 x P0.5







DIMENSIONS

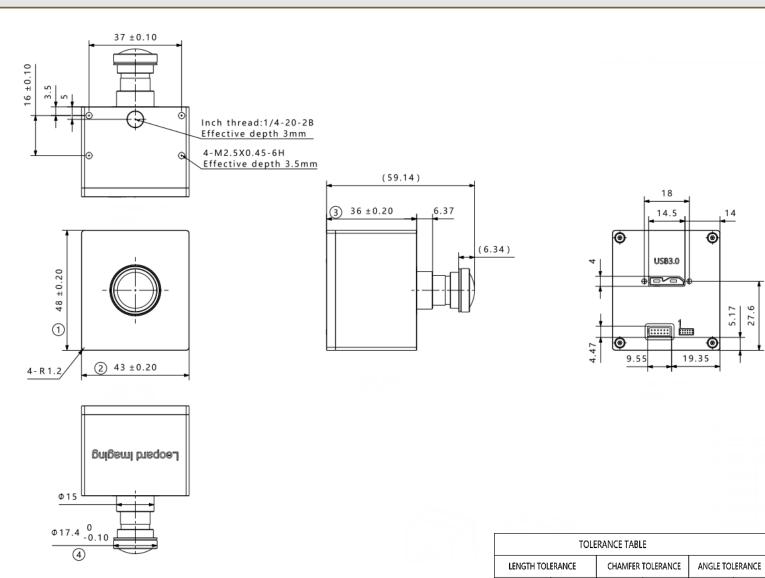


NOTE:

- ullet \otimes marked are important sizes.
- Other unmarked tolerances refer to the tolerance table.
- Unit: mm

TOLERANCE TABLE						
LENGTH TOLERANCE CHAMFER TOL		TOLERANCE	LERANCE ANGLE TOLERANCE			
Size X	Tolerance	Size X	Tolerance	Size X	Tolerance	
0.5 < X≤3	±0.1	0.5 < X≤3	±0.2	X≤10	±1°	
3 < X≤6	±0.1	3 <x≤6< td=""><td>±0.5</td><td>10 < X≤50</td><td>±30'</td></x≤6<>	±0.5	10 < X≤50	±30'	
6 < X≤30	±0.2	6 < X≤30	±1	50 < X≤120	±20'	
30 < X≤120	±0.3			120 < X≤400	±10'	
120 < X≤400	±0.5					
400 < X≤1000	±0.8	X > 30	±2	X > 400	±5'	
X > 1000	±1.2					



■ INTERFACE

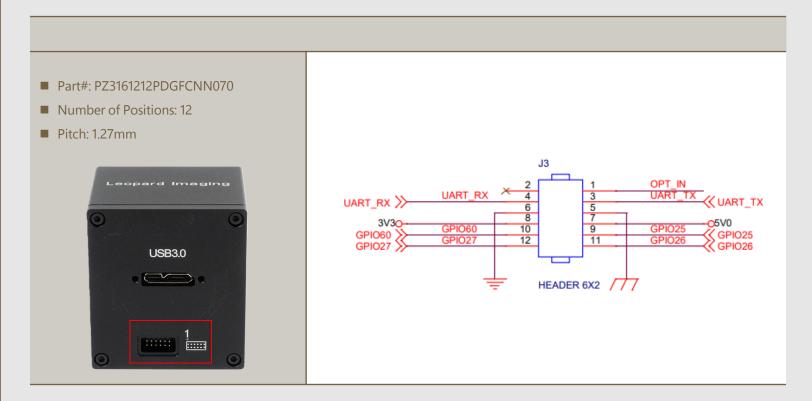

PINOUT DETAILS

Pin No	Pin Name	Description	Pin Type	Voltage Level
1	OPT_IN	Isolated Input of optoiso	Input	Max 30V
2	NC	No connection	-	-
3	UART_TX	Transmitting end of UART of CYUSB3014	Output	3.3V
4	UART_RX	Receiving end of UART of CYUSB3014	Input	3.3V
5	GND	Field Ground of optoiso	-	-
6	GND	Digitial Ground	-	-
7	5V0	5V power	Power	5V
8	3V3	3.3V power	Power	3.3V
9	GPIO25	General-purpose input/output	Bidir	3.3V
10	GPIO60	General-purpose input/output	Bidir	3.3V
11	GPIO26	General-purpose input/output	Bidir	3.3V
12	GPIO27	General-purpose input/output	Bidir	3.3V



REVISION HISTORY

Revision	Description	Release Date
0.1	Initial draft.	13 Nov 2025

910 Auburn Ct, Fremont, CA 94538, USA Phone: +1 (408)263-0988

Fax: +1 (408)217-1960

Email: sales@leopardimaging.com Website: www.leopardimaging.com



Leopard Imaging Inc.