



LEOPARD
IMAGING

LI-IMX900C-MIPI-078H



Address:

910 Auburn Ct
Fremont, CA 94538
USA



Phone:

+1 (408)263-0988

Fax:

+1 (408)217-1960



Sales:

sales@leopardimaging.com

Support:

support@leopardimaging.com

INTRODUCTION

The LI-IMX900C-MIPI-078H is a MIPI CSI-2 camera equipped with Sony diagonal 5.81 mm (Type 1/3.1) Pregius CMOS image color sensor IMX900 which features a global shutter, and achieves high sensitivity and low dark current. This camera outputs 8-bit / 10-bit / 12-bit RAW data.

SPECIFICATIONS


Sensor	Sony Diagonal 5.81 mm Pregius Sensor IMX900
Optical Format	1/3.1"
Shutter Type	Global shutter
Resolution	2064 (H) x 1552 (V) (active pixels)
Pixel Size	2.25 x 2.25 μm
Output Format	8-bit / 10-bit / 12-bit RAW data
Maximum Frame Rate	8-bit: 121 fps @ All-pixel scan mode 10-bit: 113.4 fps @ All-pixel scan mode 12-bit: 70.6 fps @ All-pixel scan mode
ISP	Not included
Color / Mono	Color sensor
Interface	4-lane MIPI CSI-2
Power Consumption	~ 0.3W
Operating Temp	-30°C ~ +70°C
Storage Temp	-30°C ~ +70°C
Weight	~ 14 g
Part#	LI-IMX900C-MIPI-078H

APPLICATIONS




- FA camera
- Code reading camera
- Embedded vision systems

LENS SPECIFICATIONS

Focal Length	3.6 mm
Aperture, F/#	2.0 $\pm$ 5%
Field of View (FOV)	78° horizontal
TV Distortion	-10 %
Relative Illumination	> 78 %
IR Filter	650 nm IR cut Filter
Lens Mount	M12 x P0.5

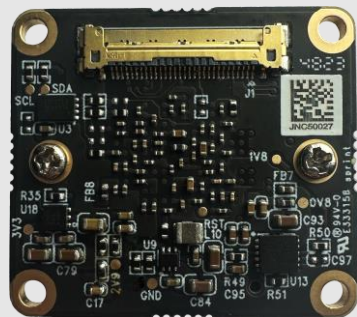

DIMENSIONS

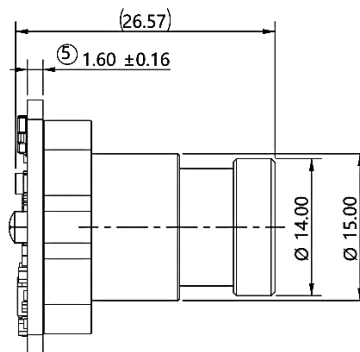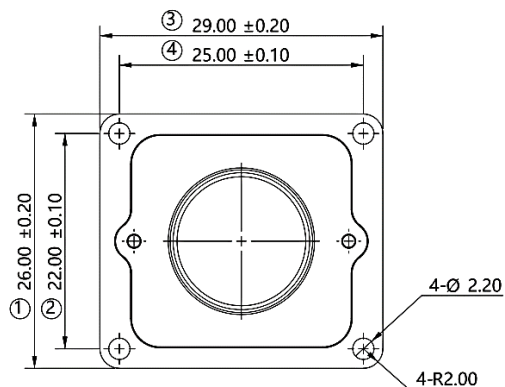


TOLERANCE TABLE					
LENGTH TOLERANCE		CHAMFER TOLERANCE		ANGLE TOLERANCE	
Size X	Tolerance	Size X	Tolerance	Size X	Tolerance
0.5 < X ≤ 3	±0.1	0.5 < X ≤ 3	±0.2	X ≤ 10	±1°
3 < X ≤ 6	±0.1	3 < X ≤ 6	±0.5	10 < X ≤ 50	±30'
6 < X ≤ 30	±0.2	6 < X ≤ 30	±1	50 < X ≤ 120	±20'
30 < X ≤ 120	±0.3	X > 30	±2	120 < X ≤ 400	±10'
120 < X ≤ 400	±0.5			X > 400	±5'
400 < X ≤ 1000	±0.8				
X > 1000	±1.2				

NOTE:

- ⊗ marked are important sizes.
- Tolerances for the unmarked refer to the tolerance table.
- All materials are compliant with RoHS requirements.
- Unit: mm

MIPI CONNECTOR INTERFACE J1

- Connector Part#: 20525-030E-02
- Number of Positions: 30
- Mating I-PEX Cable: FAW-1233-03
- Sensor I2C Address: 0X36 (7-bit)
- External Power Supply: 5V0, 3.3V

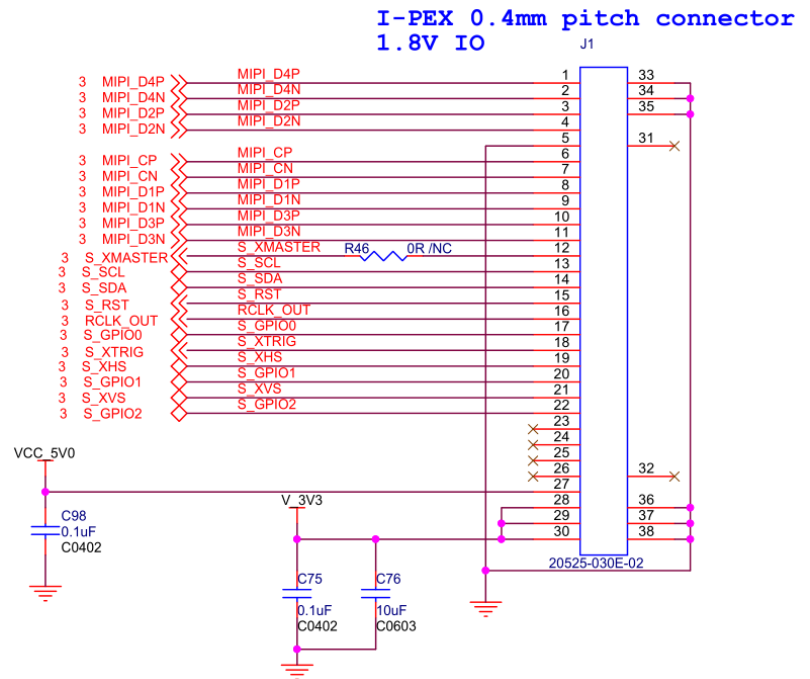

MIPI Connector Pinout

Pin No	Signal Name	Pin Type	Description	Voltage Level
1	MIPI_D4P	OUTPUT	MIPI Clock Data4 Differential Pair +	MIPI DPHY
2	MIPI_D4N	OUTPUT	MIPI Clock Data4 Differential Pair -	MIPI DPHY
3	MIPI_D2P	OUTPUT	MIPI Clock Data2 Differential Pair +	MIPI DPHY
4	MIPI_D2N	OUTPUT	MIPI Clock Data2 Differential Pair -	MIPI DPHY
5	GND	-	-	-
6	MIPI_CP	OUTPUT	MIPI Clock Lane Differential Pair +	MIPI DPHY
7	MIPI_CN	OUTPUT	MIPI Clock Lane Differential Pair -	MIPI DPHY
8	MIPI_D1P	OUTPUT	MIPI Clock Data1 Differential Pair +	MIPI DPHY
9	MIPI_D1N	OUTPUT	MIPI Clock Data1 Differential Pair -	MIPI DPHY
10	MIPI_D3P	OUTPUT	MIPI Clock Data3 Differential Pair +	MIPI DPHY
11	MIPI_D3N	OUTPUT	MIPI Clock Data3 Differential Pair -	MIPI DPHY
12	X_MASTER	INPUT	Master / Slave selection input (Reserved) Master mode in default	1.8V
13	S_SCL	INPUT	1.8V IO Camera I2C SCL signal (Pulled up to 1.8V with 1k)	1.8V

Pin No	Signal Name	Pin Type	Description	Voltage Level
14	S_SDA	I/O	1.8V IO Camera I2C SDA signal (Pulled up to 1.8V with 1k)	1.8V
15	S_RST	INPUT	1.8V IO camera reset signal (Pulled up to 1.8V with 10k)	1.8V
16	RCLK_OUT	INPUT	Reserved CLK for camera	1.8V
17	S_GPIO0	OUTPUT	1.8V IO camera digital output	1.8V
18	S_XTRIG	INPUT	1.8V IO camera trigger signal	1.8V
19	S_XHS	I/O	Horizontal sync signal	1.8V
20	S_GPIO1	OUTPUT	1.8V IO camera digital output	1.8V
21	S_XVS	I/O	Vertical sync signal	1.8V
22	S_GPIO2	OUTPUT	1.8V IO camera digital output	1.8V
23	-	-	-	-
24	-	-	-	-
25	-	-	-	-
26	-	-	-	-
27	5V0	POWER	5V power supply	5V
28	3V3	POWER	3.3V power supply	3.3V
29	3V3	POWER	3.3V power supply	3.3V
30	3V3	POWER	3.3V power supply	3.3V

LI-RB-IMX900C-MIPI-078H

INTRODUCTION

When connecting IMX900 MIPI camera with Qualcomm platform, following adaptor board and cables will be needed.

P/N for kit connection: **LI-RB-IMX900C-MIPI-078H**


BOM

#	Items	QTY
1	LI-IMX900C-MIPI-078H	1
2	LI-RB5-Adapter-Flex-Cable V1.0	1
3	FAW-1243-01	1
4	USB 2.0 Cable (Connecting with platform USB port as camera external power source)	1

NOTE: Qualcomm® Development Kit is **NOT** included.

Supported platform:

- ✓ Qualcomm® RB3 Gen 2 Vision Kit
- ✓ Qualcomm® IQ-9075 evaluation kit (RB8)

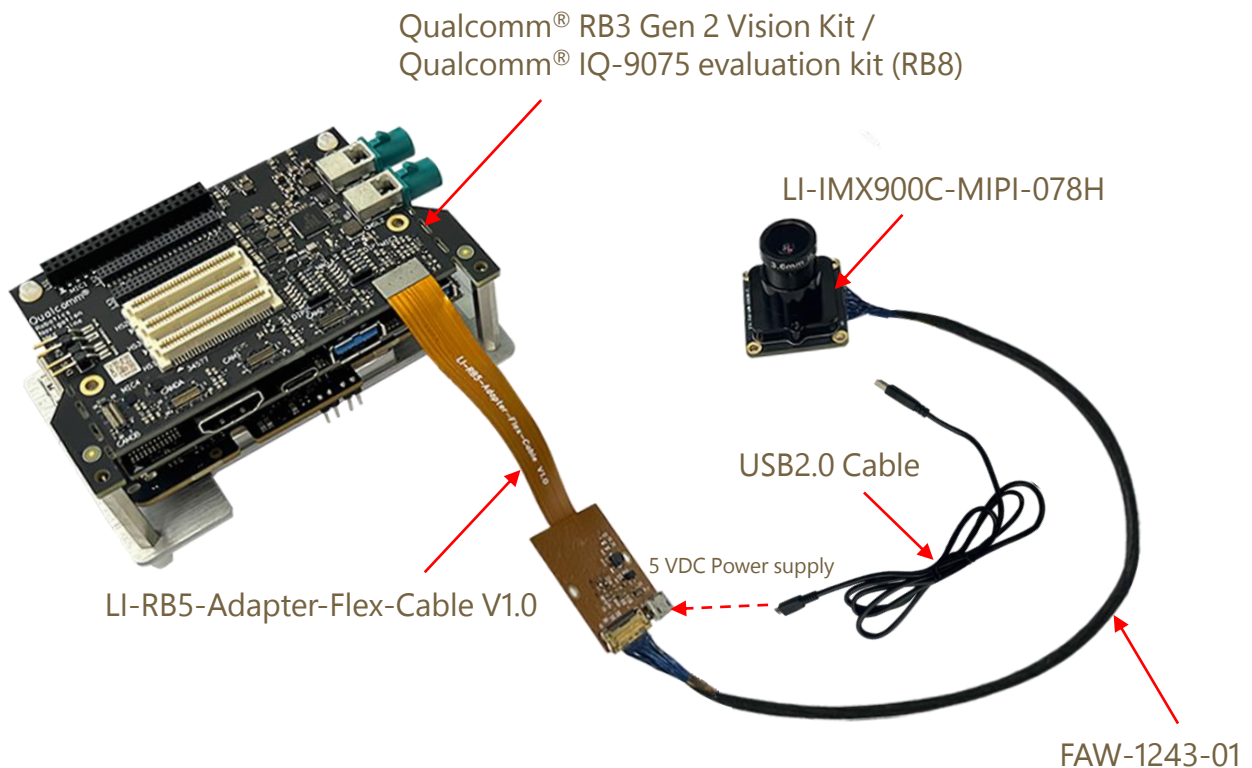

LI-RPI-IMX900C-MIPI-078H

INTRODUCTION

When connecting IMX900 MIPI camera with Raspberry platform, following adaptor board and cables will be needed.


P/N for kit connection: **LI-RPI-IMX900C-MIPI-078H**

BOM

#	Items	QTY
1	LI-IMX900C-MIPI-078H	1
2	LI-FPC22-IPEX-PI	1
3	FAW-1233-01	1
4	USB 2.0 Cable (Connecting with platform USB port as camera external power source)	1

NOTE: Raspberry Pi 5 Development Kit is **NOT** included.

Supported platform: Raspberry Pi 5 Development Kit

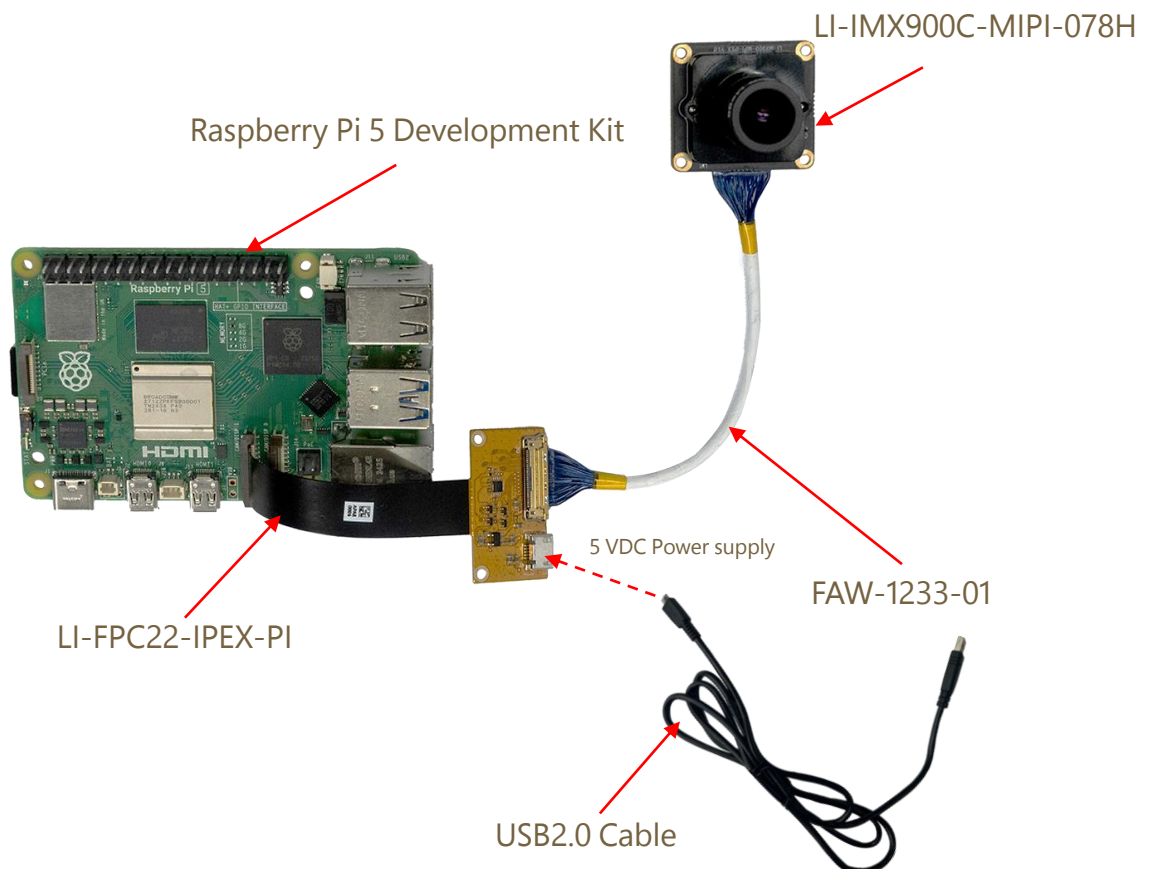

● REVISION HISTORY

Revision	Description	Release Date
1.0	First release.	05 Nov 2024
1.1	Added supported platforms.	09 Aug 2025
1.2	Updated Qualcomm supported platform models.	07 Jul 2026

910 Auburn Ct, Fremont, CA 94538, USA

Phone: +1-408-263-0988

Fax: +1-408-217-1960

Email: sales@leopardimaging.com

Website: www.leopardimaging.com



Leopard Imaging Inc.